

**Optimal Beverage Quality and Consistency.
Optimal Equipment Performance & Life.**

Impact On Business

- Serve great tasting beverages.
- Drinks stay carbonated longer.
- Assure customer satisfaction.
- Reduce wear – extend equipment life.

Value

- Increase beverage sales and profit.
- Reduce maintenance hassles and expense.
- Satisfied customers tell their friends and keep coming back.

Performance

- Reduce chlorine and off-tastes and odors,
- Remove dirt and sediment particles that can hinder carbonation, and wear and clog equipment components.
- Reduce variables that can interfere with Brix consistency.

Where indicated, products are Tested and Certified by NSF International. Refer to the Performance Data Sheet available for each system for Certification Information. Performance data sheets are available on our website, optipurewater.com.

**Compare the Performance . .
. . Measure the Difference**



FX-12, FXC-12

Application Guide	
Carbonators	1
Syrup bag-in-box /month	up to 30

- Tested and Certified by NSF International.



FX-22, FXC-22

Application Guide	
Carbonators	1 or 2
Syrup bag-in-box /month	up to 60

- Tested and Certified by NSF International.
- Same as above with added prefiltration for water with high levels of silt/sediment.



FX-22P, FXC-22P

Application Guide	
Carbonators	2 or 3
Syrup bag-in-box /month	over 60

- High-flow parallel configuration.



FX-22P+, FXC-22P+

Application Guide	
Carbonators	2 or 3
Syrup bag-in-box /month	over 60

- Tested and Certified by NSF International.
- High-flow parallel configuration.
- Same as above with added prefiltration for water with high levels of silt/sediment.



FX-22PB+


Application Guide	
Carbonators	3 or 4
Syrup bag-in-box /month	over 75

- Gradient density prefilter inhibits clogging and extends system life.
- High-flow parallel configuration for high volume and multi-point applications.

Fountain Beverages

Specifications and Performance Data

System Features

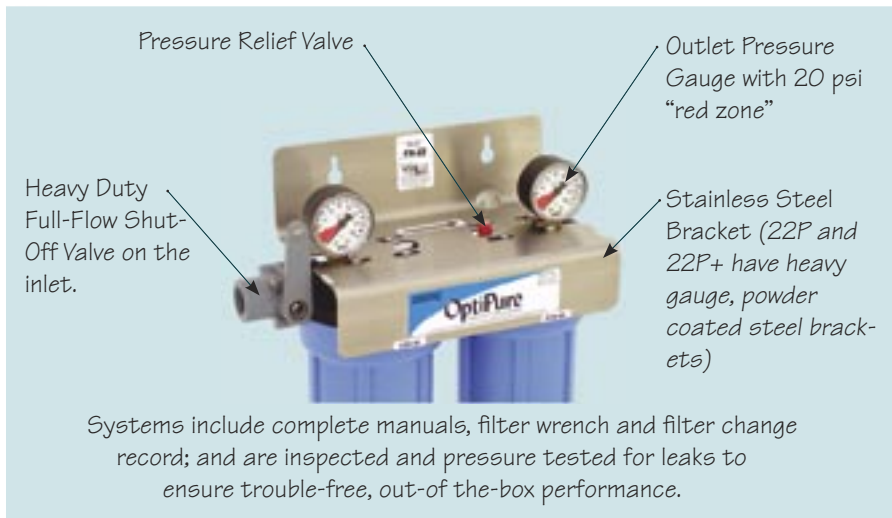

The OptiPure™ Advantage



Warranty Information

Systems have a three year warranty against defects in materials and workmanship. For complete warranty information refer to the warranty statement included with each system.

System Application Data

Model	FX-12	FX-22	FX-22P	FX-22P+	FX-22PB+
Models w/ Cyst Reduction*	FXC-12	FXC-22	FXC-22P	FXC-22P+	
Carbonators	1	1 or 2	2 or 3	2 or 3	3 or 4
Syrup bag-in-box per month	up to 30	up to 60	over 60	over 60	over 75
Capacity in gallons-FX (liters)	30,000 (113,550)	60,000 (227,100)	60,000 (227,100)	60,000 (227,100)	100,000 (378,000)
Capacity in gallons-FXC (liters)	36,000 (136,200)	36,000 (136,200)	72,000 (272,500)	72,000 (272,500)	N/A
Service Flow Rate	3 gpm (11 lpm)	3 gpm (11 lpm)	6 gpm (23 lpm)	6 gpm (23 lpm)	10 gpm (38 lpm)
Dimensions (Height x Width x Depth, inches)	25 x 6.5 x 5	25 x 11.5 x 5	26.5 x 12.5 x 9.75	26.5 x 17.5 x 9.75	29 x 25.5 x 15.25
Connection - Inlet & Outlet	1/2" NPTF (Female)				3/4" NPTF
Pressure Range	10-125 psi (0.7-8.6 bar)				
Temperature Range	35°-100°F (2° - 38°C)				
Particulate Reduction-FX	Greater than 98% @ 5 micron				
Particulate Reduction-FXC	Tested and verified at 0.5 micron by an independent laboratory.				

Superior Carbon Media

Dual Filtration Capability

The latest filter construction technology gives OptiPure CTO and XTO cartridges the highest chemical reduction capacity, combined with the ability to trap and hold dirt & sediment for the life of the filter with very little flow restriction. This dual filtration capability delivers superior performance and great value.

Replacement Cartridges, FX

Model	Cartridge	Item #
FX-12	CTO-20	252-20120
FX-22	(2) CTO-20	252-20120
FX-22P	(2) CTO-20	252-20120
FX-22P+	(1) S5-20 (2) CTO-20	252-10120 252-20120
FX-22PB+	(1) S5-20B (2) CTO-20B	252-10410 252-20420

Replacement Cartridges, FXC

Model	Cartridge	Item #
FXC-12	XTO-20	252-20140
FXC-22	XTO-20	252-20140
FXC-22P	(2) XTO-20	252-20140
FXC-22P+	(1) S5-20 (2) XTO-20	252-10120 252-20140

OptiPure Dealer:

Manufactured by FilterXpress a division of Procam Controls Inc.
2605 Technology Dr. Bldg 300 Plano, TX 75074 (972) 881-9797 FAX (972) 422-6262
www.optipurewater.com

© 2003 FilterXpress Form # LITFXBEV0104