

Snapshot

The **FXPT-11CR** is a single-housing water treatment system with drop-in 10" cartridge that reduces sediment down to 1 micron, reduces chlorine up to 35,000 gallons at 1 gpm, and reduces chloramine at a flow rate of 0.5 gpm for 3,500 gallons. The FXPT-11CR is designed to act as a polishing filter on reverse osmosis permeate to remove residual chloramine where present in city water supplies.

System Benefits

- Reduces maintenance frequency and cost, and extends equipment life.
- Gradient-density sediment filtration protects against dirt, rust and other debris down to 1 micron.
- Catalytic-carbon filtration provides added protection against chloramines that may be present in water supplies.
- 3/8" Push-to-Connect Inlet/Outlet Fittings.
- Sturdy mounting bracket and full-flow inlet shut-off valve simplify installation.
- Inlet shut-off and depressurization valves make filter replacement quick and simple.
- Minimizes waste by only replacing drop-in cartridge and reusing filter sump.

ITEM #: _____ QTY: _____
JOB NAME/NUMBER _____




Application

STEAM & COMBI OVENS - For the reduction of chloramines on RO permeate.

ESPRESSO, HOT WATER TOWERS, COFFEE BREWERS - For the reduction of chloramines on RO permeate.

Installation Tips

- Feed-water connection to system should be COLD only.
- Do not exceed system specifications for temperature and pressure.
- Allow 3" clearance below system for filter housing removal and cartridge replacement.
- Connect filtered water line to coffee and steam production connections only. Do not use for condenser water.
- Detailed installation, operation & maintenance manual included with each system.
- No activation procedure or flushing required for system to perform as specified.

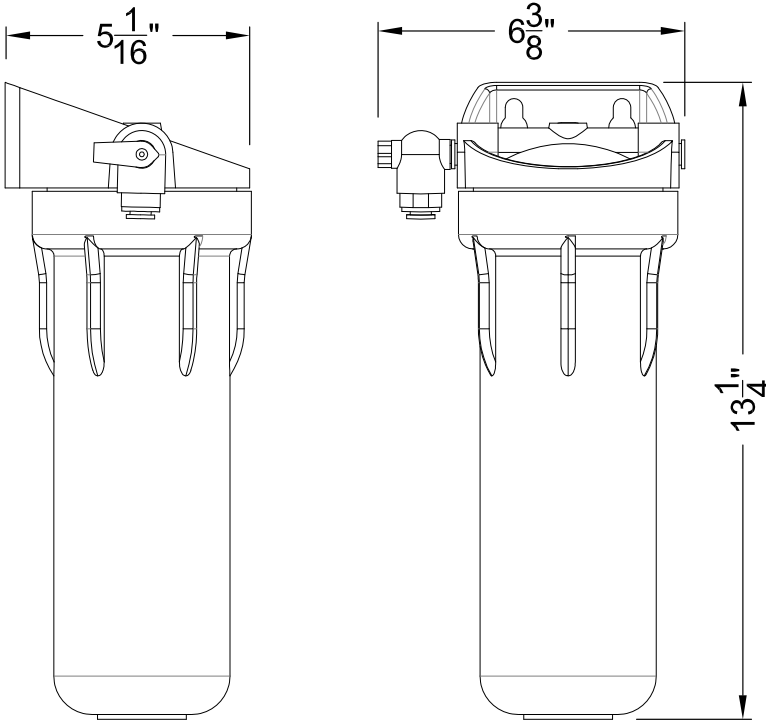

► Specifications

System	
Dimensions Height x Width x Depth, inches	13-1/4" x 6-3/8" x 5-1/16"
Connection - Inlet & Outlet	3/8"PtC
Operating Pressure Range	10-125 psi (0.7 -8.6 bar)
Inlet Water Temperature Range	35 - 100°F (2 - 38°C)
Shipping Weight	7 lbs.
Performance	
Chloramine Reduction Capacity	3,500 gals (13,249 liters)
Chlorine Reduction Capacity @ 1gpm	35,000 gals (132,489 liters)
Service Flow Rate (Chloramine Reduction)	0.5 gpm (1.9 lpm)
Sediment Reduction	1 micron (nominal)

► Replacement Cartridge(s)

Model	Part Number	Qty
CCM-10	252-20610	1

It is recommended that filters be changed every six months, when capacity is reached or when effluent pressure or flow becomes inadequate.

This product is for commercial use only and must be installed and maintained according to manufacturer's guidelines.

Do not use on water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

► Warranty

Systems have a 3-year warranty against defects in material and workmanship. For complete warranty information, contact OptiPure customer service.

Dealer/Distributor Info:

OptiPure, a division of AQUION
2605 Technology Dr., Bldg 300 Plano, TX 75074
p: 972.881.9797; f: 972.422.6262
e: info@optipure.net www.optipurewater.com