



Model: **AMS-QT**
Part #: 204-53040

Snapshot

The AMS-QT is a 15" Qwik-Twist replacement membrane for BWS350 and OP350 Systems that reduces Total Dissolved Solids (TDS, minerals responsible for scale and corrosion, at a flow rate of up to 350-gallons per day.

REPLACEMENT CARTRIDGE

ITEM #: _____ QTY: _____

JOB NAME/NUMBER _____

Cartridge Benefits

- Substantially reduces scale and corrosion problems related to high TDS.
- Qwik-Twist cartridge makes changing the filter quick, easy and sanitary.



Application


Applications requiring BWS350 & OP350 Reverse Osmosis (RO) Systems

Installation Tips

- Insure cartridge is designed to replace the existing cartridge.
- Do not exceed cartridge specifications for temperature and pressure.
- Allow 3" clearance below system for filter cartridge removal and replacement.
- Feed-water connection to system should be COLD only.



Model: **AMS-QT**
Part #: 204-53040

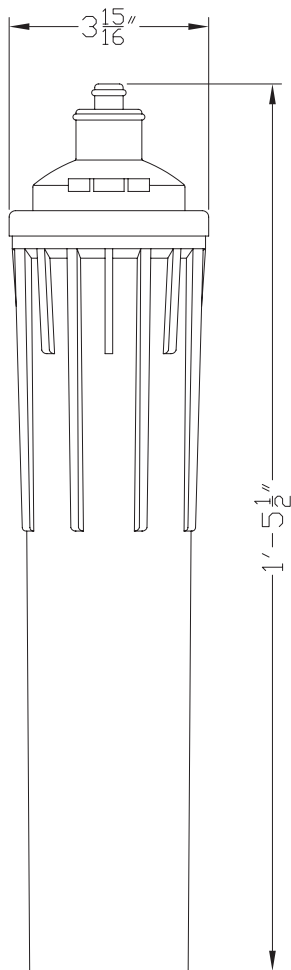

WARNING:
Cancer and Reproductive Harm -
www.P65Warnings.ca.gov.

► Specifications

Cartridge	
Dimensions (Height x Width x Depth, Inches)	17.5" h x 4" w x 4" d
Operating Pressure Range	10 - 125 psi (0.7 - 8.6 bar)
Inlet Water Temperature Range	35° - 100° F (2° - 38° C)
Shipping Weight	5 lbs.
Performance	
Service Flow Rate	Up to 350 gpd (1,325 lpd)

► System(s) Cartridge Used In

Model	Qty
BWS350 RO Systems	1
OP350 RO Systems	1

It is recommended that pre/post-filters and mineral addition cartridges are changed every 6 months, when capacity is reached or when feedwater pressure or flow becomes inadequate.

Membrane life varies depending on feedwater conditions and pre-filter maintenance. It is 12-18 months under typical conditions, but it can be as long as 3-5 years.

This product is for commercial use only and must be installed and maintained according to manufacturer's guidelines.

Do not use on water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

► Warranty

Replacement filter cartridges are warranted for defects in material and workmanship only. Service life of replacement filter cartridges varies significantly with local water conditions and volume and thus cannot be warranted. Furthermore, separation membranes are equally susceptible to feed water conditions (e.g. presence of iron, alum and silica) and shall be warranted only for defects in construction. Membrane failure due to fouling, hydrolysis, oxidation or other damage caused by the local water conditions is not covered under warranty. For complete warranty information, contact OptiPure customer service or go to www.optipurewater.com.

Dealer/Distributor Info:

OptiPure, A Division of Aquion, Inc.
101 S. Gary Ave., Suite A
Roselle, IL 60172
p: 972.881.9797 e: info@optipure.net
www.optipurewater.com