

OptiPure

Snapshot

The SFT-Q is a 15" Qwik-Twist cartridge that has high capacity ion-exchange resin with a hardness removal capacity of 1,800 grains at a flow rate of 0.5 gpm. The cartridge also reduces sediment down to 10-microns.

Cartridge Benefits

- Eliminates the formation of scale by taking out water hardness minerals.
- Reduces maintenance frequency and cost, and extends equipment life.
- Ion-Exchange Resin for the selective removal of hardness minerals with up to 1,800 grains of capacity.
- High capacity cartridge extends filter system life reducing maintenance frequency.
- 1/4 turn QT Qwik-Twist bayonet cartridge makes changing the filter quick, easy and sanitary.

Model: **SFT-Q**
Part #: 300-05890

REPLACEMENT CARTRIDGE

ITEM #: _____ QTY: _____

JOB NAME/NUMBER _____



Application

ESPRESSO MACHINES

TEA BREWERS

BUN WARMERS


SMALL TABLE-TOP STEAMERS

Installation Tips

- Insure cartridge is designed to replace the existing cartridge.
- Do not exceed cartridge specifications for temperature and pressure.
- Allow 3" clearance below system for filter cartridge removal and replacement.
- No activation procedure or flushing is required for cartridge to perform as specified.
- Feed-water connection to system should be COLD only.



Model: **SFT-Q**
Part #: 300-05890

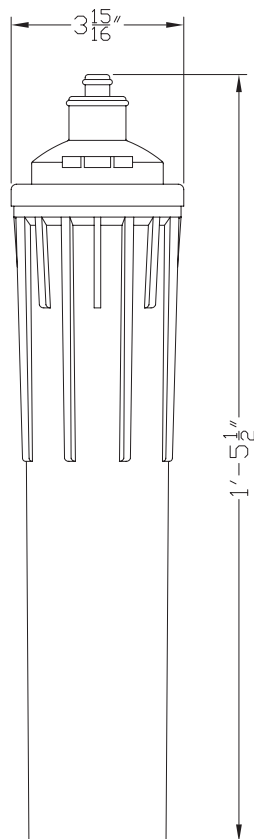

WARNING:
Cancer and Reproductive Harm -
www.P65Warnings.ca.gov

► Specifications

Cartridge	
Dimensions (Height x Width X Depth, Inches)	17.5" h x 4" w x 4" d
Connection - Inlet & Outlet	N/A
Operating Pressure Range	10 - 125 psi (0.7 - 8.6 bar)
Inlet Water Temperature Range	35° - 100° F (2° - 38° C)
Shipping Weight	5 lbs.
Performance	
Service Flow Rate	0.5 gpm (1.9 lpm)
Sediment Reduction	10 microns (nominal)
Hardness Reduction Capacity	1,800 grains

► System(s) Cartridge Used In

Model	Part Number	Qty
QTSFT-3	160-00450	2
QTSFT-1	160-52017	1

It is recommended that pre/post-filters and mineral addition cartridges are changed every 6 months, when capacity is reached or when feedwater pressure or flow becomes inadequate.

Membrane life varies depending on feedwater conditions and pre-filter maintenance. It is 12-18 months under typical conditions, but it can be as long as 3-5 years.

This product is for commercial use only and must be installed and maintained according to manufacturer's guidelines.

Do not use on water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

► Warranty

Replacement filter cartridges are warranted for defects in material and workmanship only. Service life of replacement filter cartridges varies significantly with local water conditions and volume and thus cannot be warranted. Furthermore, separation membranes are equally susceptible to feed water conditions (e.g. presence of iron, alum and silica) and shall be warranted only for defects in construction. Membrane failure due to fouling, hydrolysis, oxidation or other damage caused by the local water conditions is not covered under warranty. For complete warranty information, contact OptiPure customer service or go to www.optipurewater.com.

Dealer/Distributor Info:

OptiPure, A Division of Aquion, Inc.
101 S. Gary Ave., Suite A
Roselle, IL 60172
p: 972.881.9797 e: info@optipure.net
www.optipurewater.com