


# INSTALLATION INSTRUCTIONS FOR O-RING LUBE & CARTRIDGE FLUSHING INSTRUCTION

## O-RING LUBE

H<sub>2</sub>Optimo cartridges are designed and manufactured to very tight tolerances.


Installing technicians may need to add a small amount of food grade lubricant to assure an easy insertion into the head.

### EA Cartridge

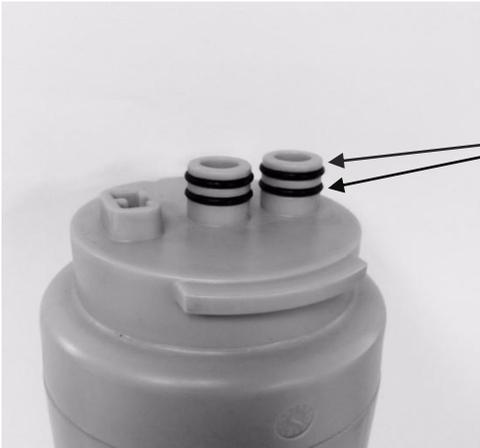

Lubricate all **four o-rings** with a good food grade silicon lubricant prior to installing the filter head.

### ERC Cartridge

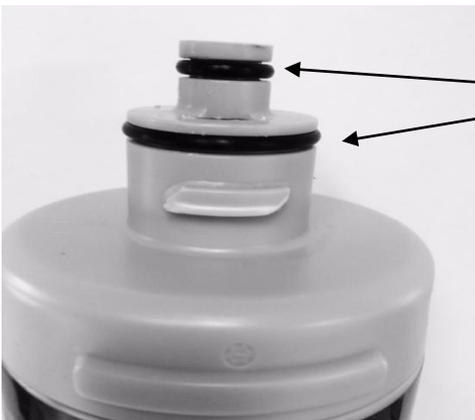

Lubricate **both o-rings** with a good food grade silicon lubricant prior to installing the filter head.

## CARTRIDGE FLUSHING INSTRUCTION

**IMPORTANT:** After installing the new filter, flush the cartridge by running water through it for 3-5 minutes or until water is clear before putting in use. This will purge any air and fines from the cartridge. Run flushing water into a drain or bucket. Do not flush into the food service equipment.