



Model: **WCSL-10**
Part #: 300-05114

Model: **WCESL-15**
Part #: 300-05210

Snapshot

Premium quality water with certified lead reduction for bottleless water coolers and drinking water applications.

Cartridge Benefits

- WCSL-10 and WCESL-15 are IAPMO certified to NSF/ANSI standards 42 & 53.
- Reduces dirt, rust and other debris as small as 1-micron to assure clean, clear water and protect solenoids, valves and other fittings against wear and plugging.
- Activated carbon filtration makes water and beverages taste great by reducing chlorine off taste and odor.
- Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear. Improves the quality and consistency of cold and hot beverages.



ITEM #: _____ QTY: _____
JOB NAME/NUMBER: _____

► WCESL-15

► WCSL-10



Application

LEAD REDUCTION

-Office water, bottleless water coolers and drinking fountain.

Installation Tips

- Do not exceed cartridge specifications for temperature and pressure.
- Allow 3" clearance below system for filter housing removal and cartridge replacement.
- Feed-water connection to system should be COLD only.
- Flush cartridge for three minutes.



Model: **WCSL-10**
Part #: 300-05114


Model: **WCESL-15**
Part #: 300-05210

► Specifications


Operating Pressure Range: 10 - 125 psi (0.7 - 8.6 bar)
Inlet Water Temperature Range: 35° - 100°F (2° - 38°C)

Cartridge	Part No.	Systems Cartridge Used In	Dimensions (H x W, inches)	Capacity (Chlorine, Taste & Odor Reduction)	Service Flow Rate	Sediment Reduction (Nominal)	Shipping Weight
WCSL-10	300-05114	H1-WCSL-10, H3-WCSL-10, H3T-WCSL-10	11.25"h x 3.13"w	1,500 gals. (5,678 L)	0.50 gpm (1.90 lpm)	1 micron	3 lbs.
WCESL-15	300-05210	H1-WCESL-15, H3-WCESL-15, H3T-WCESL-15	12.75"h x 3.89"w	3,000 gals. (11,356 L)	1.67 gpm (6.32 lpm)	1 micron	3 lbs.

► WCSL-10

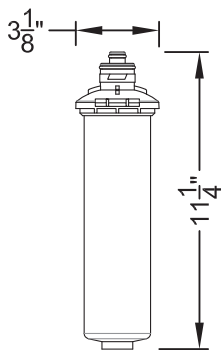

► WCESL-15

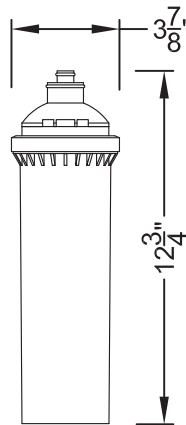

Cartridges WCSL-10 & WCESL-15 certified by IAPMO R&T to NSF/ANSI Standards 42 and 53 for the reduction of cysts, chlorine, taste and odor, when used in the systems specified above.



WARNING:
Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

It is recommended that pre/post-filters and mineral addition cartridges are changed every 6 months, when capacity is reached or when feedwater pressure or flow becomes inadequate.

Membrane life varies depending on feedwater conditions and pre-filter maintenance. It is 12-18 months under typical conditions, but it can be as long as 3-5 years.

This product is for commercial use only and must be installed and maintained according to manufacturer's guidelines.

Do not use on water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

► Warranty

All system components and assembly except for filter cartridges, separation membranes, permeate pumps, electric motors, diaphragm pumps, and rotary vane pumps shall be warranted against defects in workmanship for a period of 60 months from the date of original shipment. For complete warranty information, contact OptiPure customer service or go to www.optipurewater.com.

Dealer/Distributor Info:

OptiPure, A Division of Aquion, Inc.
101 S. Gary Ave., Suite A
Roselle, IL 60172
p: 972.881.9797 e: info@optipure.net
www.optipurewater.com